



DX14 | DX16 | DX24 | DX34 TUMBLE DRYERS



**SAFETECH FIRE
SUPPRESSION SYSTEM**
For maximal safety of your
operations



SENSO DRY+ TECHNOLOGY
Lower energy and utility costs,
lower linen replacement costs



CLOUD - BASED PLATFORM
to easily monitor your laundry
everywhere and at any time



RADIAL AND AXIAL AIRFLOW
For maximal heat transfer, low
energy consumption and short
drying time



EXTRA LARGE DOOR OPENING
For easy loading and unloading



IMPROVED DURABILITY
for your peace of mind with a 3 -
year warranty



FEATURES & BENEFITS

- Standard galvanized drum
- Large door opening for easy loading & unloading
- Self cleaning lint screen
- AutoDry capability for OPL
- Reversing drum (not for DX34)
- Coin operated
- Stainless steel drum
- Reversing drum (only for DX34)
- Stainless steel front panel
- XControl FLEX PLUS – fully programmable and customizable cycles 7" touch screen.
- User - friendly screen with operating Instructions built in as part of the control
- Complete control content available in 34 languages
- Easy - To - Use Microprocessor - Dual Digital Control or OPL Micro
- Coin Operated Easy - To - Use Microprocessor - XQ - Control (ECT)


SPECIFICATIONS

TYPE		DX14	DX16	DX24	DX34
CAPACITY					
Capacity 1:18	kg (lb)	17(37)	19(43)	27(59)	35(77)
Capacity 1:22	kg (lb)	14(31)	16(35)	24(55)	29(64)
Drum volume	l	300	350	490	634
Drum diameter	mm	Ø 673	Ø 762	Ø 838	Ø 940
AIRFLOW	l/sec	240	260 - 280	330	380
MOTORS					
Fan	kW	0,40	0,40	0,40	0,40
Drive	kW	0,40	0,40	0,40	0,40
NOISE LEVEL	dBA	63 - 64	61	61	60
GAS HEATING					
		240V/50-60Hz/1-3Ph, 380-415V/50-60Hz/3Ph 440-480V/50-60Hz/3Ph	240V/50-60Hz/1-3Ph, 380-415V/50-60Hz/3Ph 440-480V/50-60Hz/3Ph	240V/50-60Hz/1-3Ph, 380-415V/50-60Hz/3Ph 440-480V/50-60Hz/3Ph	240V/50-60Hz/1-3Ph, 380-415V/50-60Hz/3Ph 440-480V/50-60Hz/3Ph
Gas connection	NPT	1/2"	1/2"	1/2"	1/2"
Electrical connection		240V/50-60Hz/1-3Ph			
Energy	kW	16.1 - 21.4	18.8 - 26.4	30.8 - 32.8	35.8 - 48.4
	kBTU/h	55 - 73	64 - 90	105 - 112	150
STEAM HEATING					
Steam connection	NPT	-	-	3/4"	3/4"
Electrical connection		240V/50-60Hz/1-3Ph, 380-415V/50-60Hz/3Ph 440-480V/50-60Hz/3Ph			
Steam pressure	bar	-	-	5.5 - 8.6	5.3 - 6.9
ELECTRICAL HEATING					
Electrical connection					
Energy	kW	12 - 21	9 - 24	18 - 27	21 - 36
EXHAUST	mm	150	150 - 200	200	200 - 250
DIMENSIONS					
H×W×D	mm	1625x800x1055	1625x800x1155	1700x870x1350	1960x980x1190
Net weight	kg	155 - 165	165 - 170	195 - 210	325 - 335
TRANSPORT DATA					
Packed H×W×D	mm	1995x825x1730	1720x840x1240	1790x900x1450	2120x1050x1420
Gross weight	kg	165 - 180	185	210 - 215	345 - 360

DIMENSIONS

	A	B	C	D	E	F	G*	H*	I*	J	K
DX14	710	700	635	705	1055	1625	370	405	40	625	710
DX16	710	700	720	810	1155	1625	370	435	40	695	800
DX24	810	670	850	935	1350	1700	395	510	40	775	875
	depth height					width					

*Fire suppression system optional - may not be on machine.

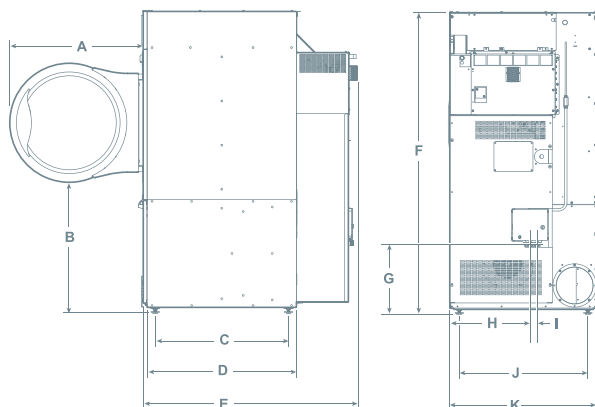


Right side

Rear side

DIMENSIONS

	A	B	C	D	E*	F	G	H*	I*	J*	K	L
DX34	740	860	1190	1960	465	980	840	190	150	350	900	1000
	depth height				width							

*Fire suppression system optional - may not be on machine.

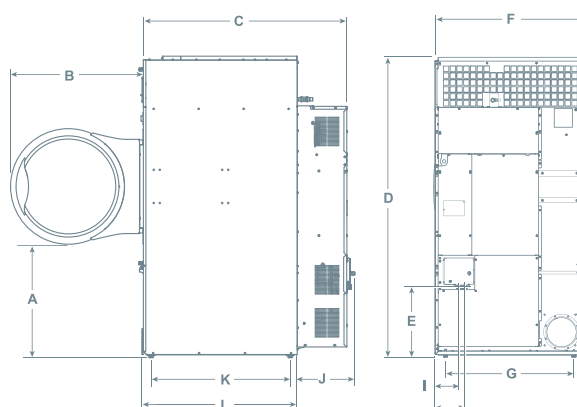

Right side

Rear side