

WMC8943

PROFESSIONAL WASHING MACHINE

9

KG LOAD



STEEL SEAL



ACTIVE DRUM™



WIFI FOR
CONNECTLIFE



PREPARED CONNECTION
TO EXTERNAL AUTO
DOSING UNITS

690

G-FACTOR



PREPARED CONNECTION
TO EXTERNAL PAYMENT
SYSTEMS

00:35

SUPER QUICK
WASH 60°C



FEATURES & BENEFITS

- Operating position: Front-operated
- Capacity: 9 kg
- Drum volume: 80 L
- Door opening: 31 cm
- Door opening angle: 180°
- Door opening: Left hinge
- Material: Stainless steel
- Base plate: Waterproof with flood sensor
- Connection power: 3,200 W
- Fuse: 16 A
- Electrical connection: 220–240 V
- Frequency: 50 Hz
- Length of power cable: 2.1 m
- Phases: 1
- Cold and hot water connection: Size 3/4" (adapter 1/2" included)
- Inlet hose: PEX inlet hose, able to withstand 10 bar at 95°C (tested to over 50 years)
- Drainage capacity: 20 l/min
- Drain system: Drain valve or pump available

DIMENSIONS

- Dimensions (H × W × D): 850 × 595 × 706 mm
- Packaging dimensions: 920 × 640 × 776 mm
- Net weight: 92.5 kg
- Gross weight: 95.9 kg
- Adjustable feet: 10 mm
- Depth with door open: 965 mm
- Inlet hose, length: 1,500 mm
- Inlet hose: 1,600 mm

FUNCTIONS

- Detection and automatic correction of imbalance in the drum: Yes
- Flood protection: Yes
- Delayed start: Yes, up to 100 hours
- Possible to connect and control via WiFi: Yes
- Overheating protection: For motor and electronics

PERFORMANCE

- Residual humidity: 49%
- Heater power: 3,000 W
- Temperature range: Cold – 90°C


OPERATIONS

- Display type: TFT display
- Language: CN, HR, CZ, DK, NL, EN, EE, FI, FR, DE, IT, JP, LV, LT, NO, PL, RU, SK, SL, ES, SE
- Detergent dispenser: Three compartment dispenser

PROGRAMMES

- Allergy cotton 60°C
- Allergy cotton 90°C
- Allergy synthetics 60°C
- Drum cleaning
- Allergy synthetics 40°C
- Eco 40–60°C
- Rough wash 90°C
- White wash 90°C Professional
- White/Coloured wash 60°C Professional
- White/Coloured wash 40°C Professional
- Quick 60°C Professional
- Quick 40°C Professional
- White/colour 20°C
- Synthetic wash 40°C Professional
- Drain
- Spin
- Rinse
- Wool and hand wash 40°C
- MOP wash 60°C
- MOP wash 90°C
- Microfibre 40°C
- Microfibre wash 60°C
- Disinfection 60°C
- Disinfection 40°C
- Disinfection 90°C

Pump version

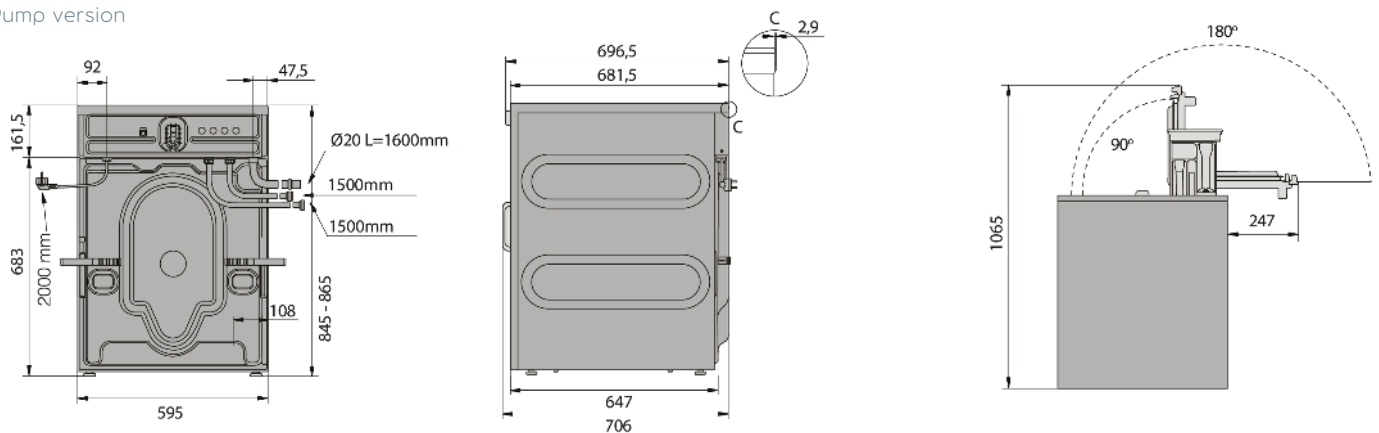

Valve version

